


Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

The NTDL-RD-30W downlight has a molded aluminum chassis for 100% heat dissipation, long life and low maintenance. Ideal for damp and dry locations where uniform soft lighting is needed.

### LED RECESSED DOWNLIGHT

<b>CRI:</b>	>80	
<b>Light color:</b>	5000K white	2590lm
	4100K natural white	2260lm
	3000K warm white	1830lm
<b>Fixture finish:</b>	Surface white electrostatic powder coated	
<b>Fixture material:</b>	Aluminum alloy	
<b>Diffuser:</b>	White acrylic lens	
<b>Optic:</b>	100°	
<b>Voltage:</b>	18 Volts to 1050MA, 12 inches wire	
<b>Lamp life:</b>	50,000 hours	
<b>Maximum wattage:</b>	30 Watts	
<b>Fixation:</b>	3 spring clips	
<b>Working temperature:</b>	-30 - +45°C	
<b>Certification:</b>	Conforms to ANSI/UL standard UL-2108, Certified to CAN/CSA standard 22.2-9.0	
<b>Power supply class II recommended:</b>		
4-	347-480VAC	NLTTC-040S105RDS
6-	100-277VAC	NTT1M1UNV-1050-42C
7-	120VAC TRIAC DIM	NTLLC-040S105RSP

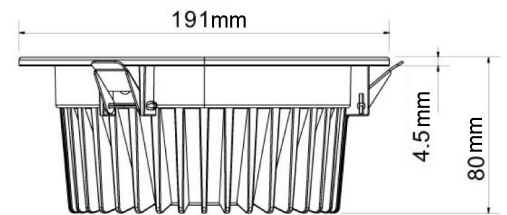

Cut out size : Ø170mm

\* For dimming or control options, please consult factory

#### Ordering Matrix / Specification

Model	Wattage	Color	Dimension
NTDL-RD	30W		19CM
		50 (5000K) 41 (4100K) 30 (3000K)	

Consult factory for availability

**\* Must have 3 inches clearance all around for heat dissipation**



#### Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2015-11 and is subject to change without notice. Please confirm with the manufacturer before placing an order.  
Copyright 2014 Natech Industrie. All rights reserved.