

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

**Description:**

The **NTALB-12** LED bar design provides a unique linear lighting solution combining style, performance and durability in a medium width strip, while reducing constructions and operating costs through installation time, energy savings and maintenance free application.

**Housing:**

The **NTALB-12** is a high precision extruded anodized aluminum that can accept a LED linear source from normal to high power.

**Lens:**

Precision fit extruded acrylic snap-in clear lens with a central focus available in:

**CL** Clear

**Mounting:**

Mounts directly on the surface.

- FC** Fixed clips (set of 2)
- SC** Swivel metal clips (set of 2)
- B** Aluminum bracket

**Application/Installation:**

The **NTALB-012** LED bar can be installed for up, or down applications or side for 180° light diffusion. Consult factory for damp application or splash area using our silicone jacketed IP67 sources. **(WP)**

**Voltage:**

- 12 VDC
- 24 VDC

**Electrical and Electronics:**

High quality diodes tested (LM80) and certified life cycle for 50,000 hours (L70). All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.


Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

**Homologation:**

Conforms to ANSI/UL standard UL-2108  
Certified to CAN/CSA standard 22.2-9.0




**NTALB12 - CL**

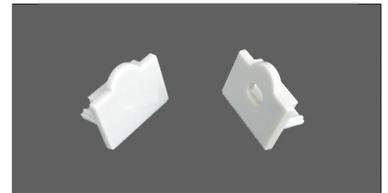

**NTALB12 - End Caps**

**Ordering Matrix / Specification**

Model	Bar	Length	Lens	Mounting	LED**	Color	Volts
<b>NTALB</b>	<b>12</b>	1000 mm 2000 mm XX mm*	<b>CL</b> Clear	<b>FC</b> Fixed Clips <b>SC</b> Swivel Clip <b>B</b> Base	<b>UT30</b> <b>UT30 WP</b> <b>UT60</b> <b>UT60 WP</b>	<b>VWW</b> (2400K) <b>WW</b> (2700K) <b>NW</b> (4100K) <b>WH</b> (5000K) <b>R</b> (Red)*** <b>B</b> (Blue)*** <b>G</b> (Green)*** <b>A</b> (Amber)***	<b>12VDC</b> <b>24VDC</b>
		* Consult factory for special lengths.			<b>HP30</b> <b>HP30WP</b> <b>HP 120</b> <b>HP120WP</b>	<b>VWW</b> (2400K) <b>WW</b> (2700K) <b>NW</b> (4100K) <b>WH</b> (5000K) <b>R</b> (Red)*** <b>B</b> (Blue)*** <b>G</b> (Green)*** <b>A</b> (Amber)***	
					<b>UT39K</b> CCT (White)	(2700-6500K)****	
					<b>RGB 150</b> <b>RGB 150 WP</b>	** Consult the LED linear source and driver data sheets for available wattages and characteristics.	
					<b>RGB 300</b> <b>RGB 300 WP</b>	*** Consult Factory **** Color Correction	

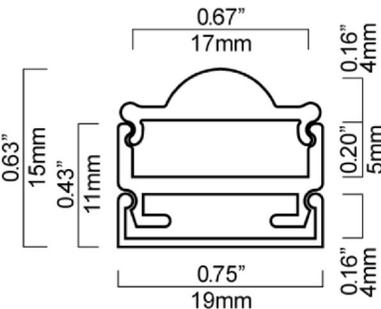

**Natech Industrie**

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2016-08 and is subject to change without notice. Please confirm with the manufacturer before placing an order. Copyright 2014 Natech Industrie. All rights reserved.