

Project :	Date :
Cat no. :	Type :
Notes :	Volts :

Applications:

The **NTTL-28W** and **NTTL-50W** are powered by a proven and reliable "LED engine".

Materials and construction ensures LED longevity while providing maximum lighting output with regards, to lumens and candle power. Designed for high efficiency and long life suitable for a myriad of innovative architectural and site lighting solutions.

- Architectural, building and facade.
- Area lighting, site, parking and landscape
- Signage, billboards, fountains statues and other elements

Housing:

Cast-aluminium IP65 housing and rugged construction provides state of the art thermal management and 100% housing heat dissipation since LED is mounted directly on the body allowing full functionality and lighting flux performance at all mounting angles and position. Stainless steel hardware.

Lenses and optical cells/ CRI

Tempered glass. Optical assembly is hermetically sealed providing ingress protection

Finish:

Corrosion and salt spray resistant electrostatic applied polyester powder coat finish for standard colors. Consult factory for special RAL chart colors and paint match.

Voltage (50/60 Hz) 28/50W
6 120-277 VAC

Caractéristiques:


- Protocol signal 4 channels
- DMX512 or RF
- IP67 power supply
- PF power factor >0.9,
- 50,000 hours
- Weight: 6lbs (2.7kg),
- Working temperature:
Min -30°C (-22°F)
Max +55°C (+131°F)
- Standard with 1M (39 inches) SJOOW 18/3 cable.
- Standard with 10' (10 inches) 18/16 gray cable for DMX signal

Mounting:


Available with different mounting options: standard 3-hole yoke mount, and slip-fit mount. Other options are available.

Certification :

Meets and exceeds industry ANSI/UL UL-1598, 8750, CAN/CSA, CSA-22.2 no 250.0 & CSA-22.2 no 250.13 standards for safety and compliance.

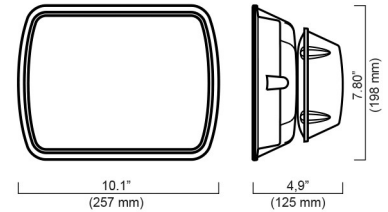

Yoke mount detail



Ordering Matrix / Specification

Model	Wattage	Voltage	Color	Lens	Beam	Mounting	Option	Housing
NTTL	28W 50W	6 120-277Vac	RGBWH- RGB+White *Natural white and warm white minimum order of 100	C clear	W1 Large S15 S28 S45 <small>* to be confirmed</small>	Y Yoke SF Slip fit	DMX	W White B Black

Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2016-12 and is subject to change without notice. Please confirm with the manufacturer before placing an order. Copyright 2014 Natech Industrie. All rights reserved.