NATECH
LEDTECTURE©

NTALB-02R

Project :	Date :
Cat No. :	Type :
Notes :	Volts :

Description:
The **NTALB-02R** LED bar design provides a unique linear lighting solution combining style, performance and durability while reducing construction and operating costs through installation time, energy savings and a maintenance free application. Ideal for surface installations.

Housing:
The **NTALB-02R** is a high precision extruded anodized aluminum bar that can accept a low-power LED source to medium power.

Lens:
Precision fit extruded acrylic for indoor use only available in:
FR   Frosted
OP   Opal (white)

Mounting:
Mounts within on a surface with:
FC   Fixed clips (set of 2)
SW   Swivel clips (set of 2)

Application/Installation:
The **NTALB-02R** LED bar can be installed, for up, or down applications. This bar can be installed on surfaces, under cabinets.

Voltage:
12 VDC
24 VDC

Electrical and Electronics:
High quality diodes tested (LM80) and certified life cycle for 50,000 hours (L70).
All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.
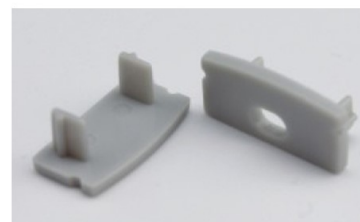
Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:
Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0

ETL LISTED
4010322
c us

Intertek
4010322

NTALB-02R - OP

NTALB-02R - Endcaps

NTALU-02R-C-90°   **NTALU-02R-C-180°**

Ordering Matrix / Specification

Model	Bar	Length	Lens	Mountings	LED**	Color	Volts
NTALB	02R				–		
		1000 mm 2000 mm XX mm*	FR Frosted OP Opal	FC Fixed Clips SC Swivel Clips	UT30 UT60	VWW (2400K) WW (2700K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	12VDC 24VDC
		*Consult factory for special lengths.			RGB 150		

** Consult the LED linear source and driver data sheets for available wattages and caracteristics.
*** Consult Factory
**** Color Correction

0.67"
17.1 mm

0.32"
8 mm

0.47"
12 mm

This specification is valid as of 2017-01 and is subject to change without notice. Please confirm with the manufacturer before placing an order.

© 2014-08