

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

### Applications :


**NTUT30** linear source consists of a LED flexible ribbon producing a reliable accent light source.

- Create a decor or set a mood with a light luminous touch or a small light presence.
- Integrated task lighting, under cabinet lighting for studios or use it in merchandising showcases, shelving or in custom furniture projects.

The **NTUT30** light heat production permits applications directly on wood, plexiglas or other types of plastics, glass surfaces or any clean non porous surface.

While the **NTUT30** does not require a heat dissipation surface it can be installed in our LEDBAR product line.

**Consult our technical specs sheets to select one our LEDBAR architectural linear profile.**

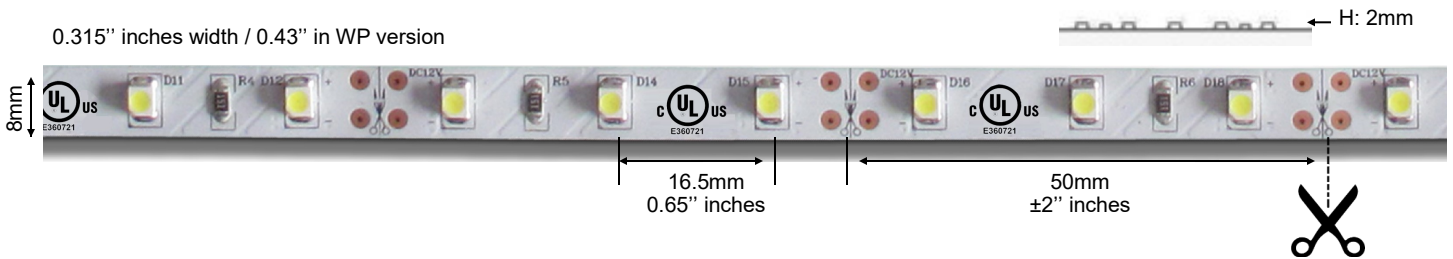

### Characteristics :

- 60 diodes per meter/ 18 per foot
- 4.6 Watts per meter/1.4 Watts per foot
- Voltage 12VDC standard.
- 24 VDC on demand
- 10 meters / 32'6" maximum length per circuit
- 120° degrees beam
- L<sub>70</sub> at 50,000 hrs LM80 available.
- **IP22** standard
- **Operating Temperatures:**  
Min -40°C/+50°C Max.

### Linear Source Dimensions:

- 8 mm (0.31") wide X 2mm (0.08") high
- IP67 version 11mm (0.43") wide.
- Length : 5 meters (16'4") per roll.
- Adhésive : Type 3M on back
- Cut every :  
50mm / 2" (3 LED) for 12 VDC  
100mm / 4" (6 LED) for 24 VDC

### Options :

- **IP67** silicone envelope jacket.
- Dimming available consult factory
- Choices of wiring and connecting devices.
- Custom cutting services on tape and profiles available.



### Ordering Matrix / Specification

Model	Strip	Color	Lumens	Volts
<b>NTUT</b>				
	<b>30 30WP</b>	<b>WH (5000K) NW (4100K) WW (2700,3000,3500K) VWW (2400K)</b>	<b>440 lm/m (WH) 450 lm/m (NW) 430 lm/m (WW) 440 lm/m (VWW)</b>	<b>12 VDC 24 VDC</b>

The strip must be connected to a low voltage output power supply according to selected voltage and power criteria  
WP indicates a weatherproof strip inside a flexible silicone sleeve. Red, Green, Blue and Amber, or light colors (in °K) available on order.

### Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, [www.natechlighting.com](http://www.natechlighting.com), [info@natechlighting.com](mailto:info@natechlighting.com)

This specification is valid as of 2015-08 and is subject to change without notice. Please confirm with the manufacturer before placing an order.  
Copyright 2014 Natech Industrie. All rights reserved.