

Project :	Date :
Cat. No.:	Type :
Notes :	Volts :

### Applications:

The **NTTL-20W** LED light engine is powered by a Bridgelux USA proven and reliable Vero™ series array. Materials and construction ensures LED longevity while providing maximum lighting output with regards, to lumens and candle power.

Designed for high efficiency and long life suitable for a myriad of innovative architectural and site lighting solutions.

- Architectural, building and facade,
- Area lighting, site, parking and landscape,
- Signage, billboards, fountains statues and other elements,
- Interior spaces, showroom, lobby and warehouse.

### Housing:

Cast-aluminium IP65 housing and rugged construction provides state of the art thermal management and 100% housing heat dissipation since LED is mounted directly on the body allowing full functionality and lighting flux performance at all mounting angles and position. Stainless steel hardware.

### Lenses and optical cells/ CRI

Optical assembly is hermetically sealed providing ingress protection IP65. Gasketed tempered glass. Standard CRI 80 (Availability CRI 70 and 90 varies depending on selected °K degree temp consult factory)

### Finish:

UV rays and corrosion resistant electrostatic applied black or white polyester powder coat finish as standard color.

### Voltage (50/60 Hz)

- 1 12 VDC
- 2 24 VDC
- 3 90-264 VAC, 0-10 volt dim
- 6 120-277 VAC, no dim
- 7 120 VAC, triac dim.

### Characteristics:

- Nominal line voltage: 120-277V 50/60Hz
- IP67 rated driver
- PF Power factor >0.9,
- 50,000 hours tested L70,
- Weight: 4 lbs (1.8kg)
- Operating temperatures:  
Min -30°C (-22°F)  
Max +55°C (+131°F)
- Comes standard with 1m (39 inches) SJ00W 18/3 cable.

### Options (consult factory):

- Triac or 0-10V dimming available
- Dali or DMX controls,
- Choices of wiring and connecting devices,

### Mounting:

Available with different mounting options: standard 3-hole yoke mount, slip-fit mount, spike or track adaptor. Other options are available (consult factory).

### Certification :


Meets and exceeds industry ANSI/UL UL-1598, 8750, CAN/CSA, CSA-22.2 no 250.0 & CSA-22.2 no 250.13 standards for safety and compliance.




**NTTL-20W-S25**



**NTTL-20W-W1**

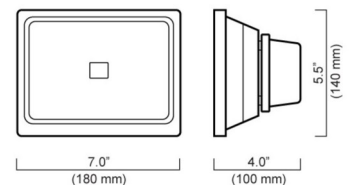

### Yoke Mount Detail:



### CCT

Color °K	Min. Pulsed Lumen	Typ. Effi Lumens/Watt
2700K	2330	108
3000K	2420	112
3500K	2510	116
4000K	2550	118
5000K	2575	119

## Ordering Matrix / Specification

Model	Wattage	Voltage	Color	Lens	Beam	Mounting	Housing color
NTTL	20W						
		1 12 VDC	W27 (2700K)	C Clear	W1 Large 120x140	Y Yoke	W White
		2 24 VDC	W30 (3000K)	FR Frost	S25 Spot 25°		B Black
		3 90-264 VAC	W35 (3500K)		S34 Spot 34°		RAL RAL
		6 120-277 VAC	W40 (4000K)		S55 Medium Spot 55°		
		7 0-120 VAC	W50 (5000K)				



5 YEARS limited manufacturer warranty under normal conditions of use.

The Bridgelux logo and Vero name are registered trademarks of Bridgelux Inc. And are used under trademark license agreement.

### Natech Industrie

1995 Francis Hughes, Laval, Qc H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, [www.natechlighting.com](http://www.natechlighting.com), [service@natechlighting.com](mailto:service@natechlighting.com)

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.  
Copyright 2014 Natech Industrie. All rights reserved.