

Project :

Date :



Cat. No. :

Type :

Notes :

Volts :

This product combines your LED power supply and dimming control into a single compact unit designed to simplify design installation and eliminate compatibility issues between LED drivers and switches

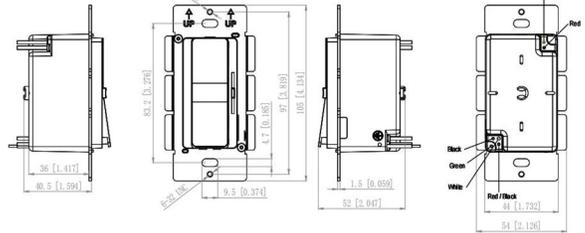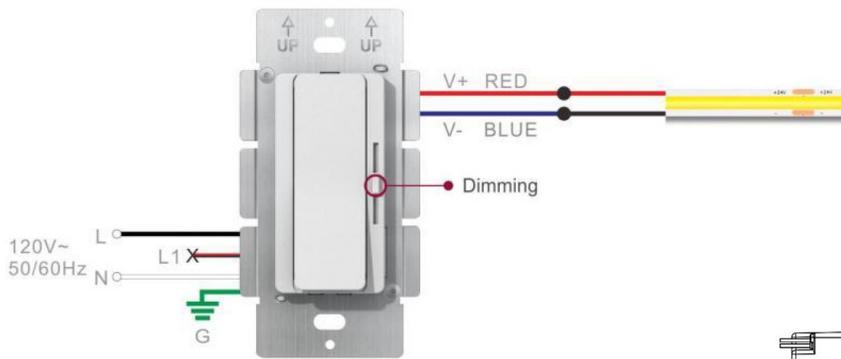

Fit with Box 3104

Or double box

Model	OTM-BD60-12-D	OTM-BD60-24-D	OTM-BD96-24-D
Certificate	UL / cUL / FCC / Class P / SELV / RoHS / Reach		
Output	DC Rate Voltage	12V (12V-13.5V adjust by knob)	24V (24V-26V adjust by knob)
	Voltage Tolerance	±0.5V	
	Load Regulation	≤2%	≤1%
	Line Regulation	≤0.5%	
	Rated current	5A	2.5A
	Rated power	60W	60W
Input	Voltage Range	120VAC	
	Frequency Range	60Hz	
	Power Factor @ full load	0.99	
	THD(Typ.) @ full load	≤10%	
	Efficiency @ full load	90.0%	91.0%
	AC Current (Max.)	0.6A	0.6A
	Inrush Current (Typ.)	50A, 150us@50% Ipeak	
	Leakage current	<0.5mA	
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed	
	Over Load	≥110% Constant current mode, recovers automatically after fault condition is removed	

Natech Industrie

1995 Francis Hughes, Laval, QC, H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-10 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.