

Projet :	Date :
No Cat. :	Type :
Notes :	Volts :

Applications :


NTUT64 linear source consists of a high efficiency LED flexible ribbon producing an intense and reliable light source and can go up to 12 meters length

- Create a decor or set a mood with the creation of a specific ambiance.
- Intergrated task lighting, under cabinet lighting scenery for studios or use it in merchansising, shelving or in custom furniture projects.

The **NTUT64** must absolutely be installed on a surface that allows heat dissipation or it must be inserted in one of our many LEDBAR aluminum profiles available to allow heat transfer and thermal management.

Do not apply directly on wood, plexiglas or other types of plastics and glass surfaces. This product must be applied on a surface where heat and temperature can create constraint.

Consult our technical specs sheets to select one of our LEDBAR architectural linear profile.

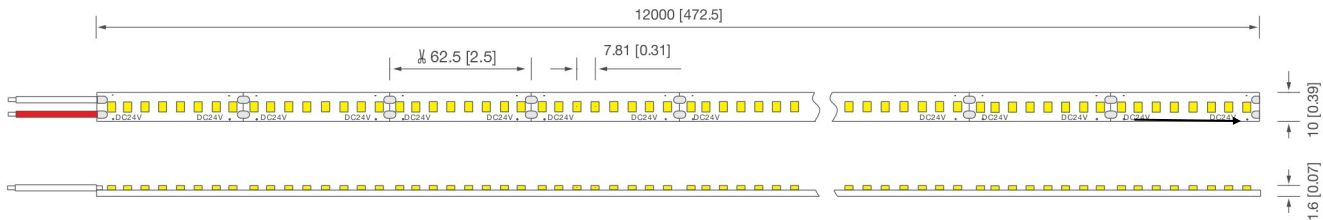

Caractéristic :

- 128 diodes per meter
- 6.4 Watts per meter
- Voltage 24VDC standard.
- 12 meters maximum length per circuit
- 120° degrees beam
- Lifespan: 80,000 hours
- **IP22** standard
- **Operating Temperatures:**
Min -40°C/+50°C Max.

Linear Source Dimensions:

- 10 mm (0.39") wide X 1.6mm (0.07") high.I.
- Adhésive : Type 3M on back
- Cut every :
62.5mm(8 led)

Options :

- Dimming available consult factory
- Choices of wiring and connecting devices.
- Custom cutting services on tape and profiles available.



Ordering Matrix / Specification

Model	Strip	Color	Lumens	Volts
NTUT				
	64	WH (5000K) NW (4100K) WW (3000K)	1100lm/m (WH) 1135lm/m (NW) 1070lm/m (WW) standard 3000k	24 VDC

Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.