

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

Description:

The **NTALB-08** LED bar design provides a unique linear lighting solution combining style, performance and durability in a round profile, while reducing constructions and operating costs through installation time, energy savings and maintenance free application.

Housing:

The **NTALB-08** is a high precision extruded anodized aluminum that can accept a LED linear source from normal to high power.

Lens:

Precision fit extruded acrylic snap-in 180° diffusing lens

FR Frosted
OP Opal (white)

Mounting:

Mounts directly on the surface
MC Mounting clip (set of 2)
CS Suspension cables
2 meters cable (set of 2)

Application/Installation:

The **NTALB-08** LED bar can be installed for up, or down or suspended applications or combined in multidirectional applications. Ideal for lighting a painting by using the steel removable clips. Consult factory for damp application or splash area using our silicone jacketed IP67 sources. (**WP**)

Voltage:

12 VDC
24 VDC

Electrical and Electronics:

High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80)
All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:


Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0



NTALB08 - FR



NTALB08 - OP

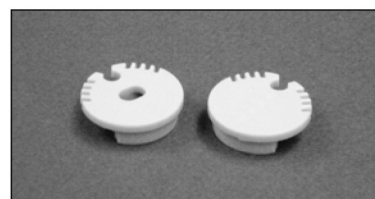


NTALB08 - End Caps



Ordering Matrix / Specification

Model	Bar	Length	Lens	Mounting	LED**	Color	Volts
NTALB	08	1000 mm 2000 mm XX mm*	FR Frosted OP Opalin	MC Mounting clip CS Suspension Cable *	UT30 (4.6W/M 450LM) UT30 WP UT60 (10W/M 896LM) UT60 WP	VWW (2400K) WW (2700, 3000, 3500K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	12VDC 24VDC
		* Consult factory for special lengths.		* 2 meters standard Consult factory for special length			
						HP30 (14.5W/M 1276LM) HP60 (10W/M 1070LM)	24VDC
						HP7.2 (7.2W/M 1008LM) HP10 (10W/M 1450LM) HP120 (19.2W/M 1600LM) VHP64 (22W/M 3437LM)	24VDC
						CCT HP304 (14W/M 560-700LM) UT39K (20W/M 790-830LM)	(2700-6500K)***
						RGB 150 (7.2W/M) RGB 300 (14.4W/M) RGB 840 (14.4W/M)	** Consult the LED linear source and driver data sheets for available wattages and characteristics *** Consult Factory **** Color Correction
						RGBW192 (15.3W/M 3438LM)	



Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.