

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

Description:

The **NTALB-65-66** LED bar design provides a unique linear lighting solution combining style, performance and durability while reducing constructions and operating costs through installation time, energy savings and maintenance free application.

Housing:

The **NTALB-65-66** is a high precision extruded anodized aluminum that can accept a LED linear source from normal to high power.

Lens:

Precision fit extruded polycarbonate snap-in 180° diffusing lens available in:

OP Opal (white)

Lens controls glare while hiding the LED's.

Mounting:

CS Suspension cable)

2 meters length (set of 2)

FC fixed clips

Application/Installation:

The **NTALB-65** LED bar be installed in suspension or fixed clips

Application/Installation:

Consult factory for damp application or splash area using our silicone jacketed IP67 sources. **(WP)**

Voltage:

12 VDC

24 VDC

Electrical and Electronics:

High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80).

All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:

Conforms to ANSI/UL standard UL-2108

Certified to CAN/CSA standard 22.2-9.0



NTALB-66




NTALB-65

Ordering Matrix / Specification


Model	Bar	Length	Lens	Mounting	LED**	Color	Volts
NTALB							
	65 66	1000 mm 2000 mm XX mm*	OP Opal	FC Fixed Clips CS Suspension Cable *	UT30 UT30 WP UT60 UT60 WP UT120 UT120 WP UT120 RGB+WH	VWW (2400K) WW (2700, 3000, 3500K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	12VDC 24VDC

* Consult factory for special lengths.

* 2 meters standard
Consult factory for special length

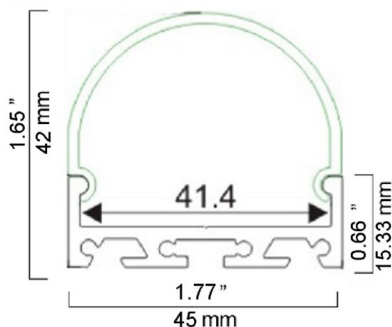

NTALB-66



NTALB-65

HP30 (14.5W/M 1279LM)
HP30WP
HP60 (10W/M 1070LM)

WW (3000K)
NW (4100K)
WH (5000K)

HP7.2 (7.2W/M 1008LM)
HP10 (10W/M 1459LM)
HP120 (19.2W/M 1600LM)
HP120WP
VHP64 (22W/M 3437LM)
VHP64WP

WW (3000K)
NW (4100K)
WH (5000K)

CCT (Blanc)
HP304 (14W/M560-700LM)
UT39K (20W/M 750-830LM)
UT39K WP

(2700-6500K)****

RGB 150 (7.2W/M)
RGB 150 WP

** Consult the LED linear source and driver data sheets for available wattages and characteristics.

RGB 300 (14.4W/M)
RGB 300 WP
RGB 840 (14.4W/M)

*** Consult Factory
**** Color Correction

RGBW192 (15.3W/M 343LM)
RGBW192 WP
RGBW 896 16W/M 320LM)

Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.