

Project :	Date :
Cat No. :	Type :
Notes :	Volts :

Description:

The **NTALB-110S-110R** LED bar design provides a unique linear lighting solution combining style, performance and durability for new construction, while reducing constructions and operating costs through installation time, energy savings and maintenance free application.

Housing:

The **NTALB-110S-110R** is a high precision extruded anodized aluminum that can accept a LED linear source from normal to high power.

Lens:

1 polycarbonate lens sliding in the profile

PC PC diffuser

Application/Installation:

The **NTALB-110S-110R** LED bar is easy to install simply screw the profile into drywall and plaster over then add the diffuser for a beautiful finish.

Consult factory for damp application or splash area using our silicone jacketed IP67 sources. (WP)

Voltage:

12 VDC
24 VDC

Electrical and Electronics:

High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80).


All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:

Conforms to ANSI/UL standard UL-2108

Certified to CAN/CSA standard 22.2-9.0



NTALB-110S



NTALB-110R




JC180

JC90


JC120

Ordering Matrix/Specification

Model	Bar	Lenght	Lens	LED**	Color	Volts
NTALB						
	71R 110S 110R	1000mm 2000mm XX mm Consult factory for special lenght	PC Diffuser	UT30 (4.6W/M 450LM) UT30 WP UT60 (10W/M 896LM) UT60 WP UT120 (20W/M 1790LM) UT120 WP UT120 RGB+WH (19.2W/M)	VWW (2400K) WW (2700,3000,3500K) NW (4100K) WH (5000K) R (red) B (blue) V (green) A (amber)	12VDC 24VDC
				HP30 (14.5W/M 1278LM) HP30WP HP60 (10W/M 1070LM)	WW (3000K) NW (4100K) WH (5000K)	
				HP7.2 (7.2W/M 1008LM) HP10 (10W/M 1450LM) HP120 (19.2W/M 1600LM) HP120WP VHP64 (22W/M 3437LM) VHP64WP	WW (3000K) NW (4100K) WH (5000K)	24VDC
				CCT (Blanc) HP304 (14W/M560-700LM) UT39K (20W/M 750-830LM) UT39K WP	(2700-6500K)****	
				RGB 150 (7.2W/M) RGB 150 WP	** Consult the LED linear source and driver data sheets for available wattages and characteristics.	
				RGB 300 (14.4W/M) RGB 300 WP RGB 840 (14.4W/M)	*** Consult Factory **** Color Correction	
				RGBW192 (15.3W/M 343LM) RGBW192 WP RGBW 896 16W/M 320LM)		






NTALB-110R



NTALB-110S

Project :	Date :
No Cat. :	Type :
Notes :	Volts :

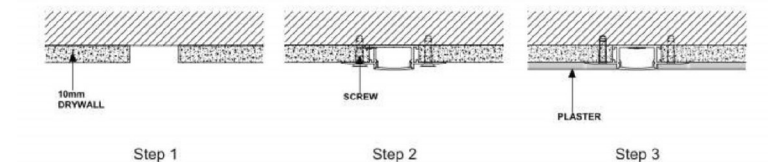

NTALB-110S



NTALB-110R

