

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

Description:

The **NTALB-77** Linear LED bar offers a stylized, dual-function design for both hanging clothes and lighting for the wardrobe, which is economical and durable in a round profile, reducing installation and maintenance costs, while making benefit from significant energy savings

Housing:

The **NTALB-77** is a high precision extruded anodized aluminum bar that can accept a low-power LED source to high power.

Lens:

Precision fit extruded PC lens snap-in 120° diffusing lens

PC Diffused PC
BK Black PC

Mounting:

Mounts within on a surface with any closet round support. (not included)

Application/Installation:

The **NTALB-77** LED can be installed downwards to illuminate the interior of a wardrobe.

OPTION: motion sensor

OPTION: endcap

OPTION: middle clip

Electrical and Electronics:

High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80).

All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.


Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:


Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0



NTALB-77BK



model	bar	Length	Lens	LED**	Color	Option	Volts
NTALB	77						
	77 (aluminium) 77BK (black)	1000 mm 2000 mm XX mm*	PC Polycarbonate BK Black PC	UT30 UT30 WP UT60 UT60 WP	VWW (2400K) WW (2700,3000,3500K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	D Motion sensor E Endcap MC Middle clip	12VDC 24VDC
		* Consult factory for special lengths.		HP30 (14.5W/M 1279LM) HP60 (10W/M 1070LM)	WW (3000K) NW (4100K) WH (5000K)		
				HP7.2 (7.2W/M 1008LM) HP10 (10W/M 1450LM) HP120 (19.2W/M 1600LM) VHP64 (22W/M 3437LM)	WW (3000K) NW (4100K) WH (5000K)	24VDC	
				CCT (Blanc) HP304 (14W/M 560-700LM) UT39K (20W/M 790-830LM)	(2700-8500K)****		
				RGB 150 (7.2W/M) RGB 300 (14.4W/M) RGB 840 (14.4W/M)			
				RGBW192 (15.3W/M 343L) RGBW 896 16W/M 320LM)			

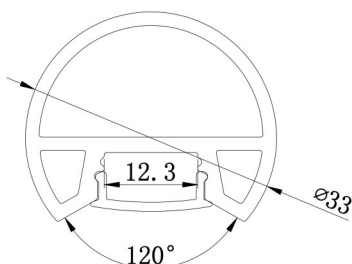

* Consult the LED linear source and driver data sheets for available wattages and characteristics.


* Consult Factory

* Color Correction


Project :	Date :
Cat. No :	Type :
Notes :	Volts :

Installation


1. Stick the LED Strip
Installer le led

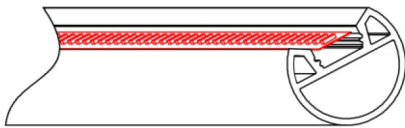


2. Press the cover
Mettre le diffuseur

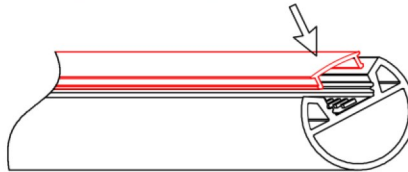


3. Lock the end cap on the end caps
inside the cabinet
Installer l'embout



4. Slide the cover plates
glisser l'autre embout dans le profilé

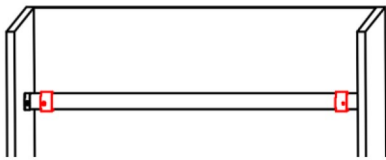

5. Fix the aluminum profile
Fixer le profilé pour le barrer



6. Installation completed
Installation complétée

