

Project :	Date :
Cat. No.:	Type :
Notes :	Volts :

### Applications:

The **NTTL-240W** LED light engine is powered by three (3) Bridgelux USA proven and reliable Vero™ series array. Each LED array has its own driver (3 per unit) for safety and reliability. Materials and construction ensures LED longevity while providing maximum lighting output with regards, to lumens and candle power. Designed for high efficiency and long life suitable for a myriad of innovative architectural and site lighting solutions.

- Architectural, building and facade,
- Area lighting, site, parking and landscape,
- Signage, billboards, fountains statues and other elements,
- Interior spaces, showroom, lobby and warehouse.

### Housing:

Cast-aluminium IP65 housing and rugged construction provides state of the art thermal management and 100% housing heat dissipation since LED is mounted directly on the body allowing full functionality and lighting flux performance at all mounting angles and position. Stainless steel hardware.

### Lenses and optical cells/ CRI

Tempered glass-14 perimeter pressure points on gasket. Large variety of distributions can be also complemented with reflectors and/or optical lenses to create very narrow beams. Optical assembly is hermetically sealed providing ingress protection IP65.

Standard CRI 80 (Availability CRI 70 and 90 varies depending on selected °K degree temp consult factory)

### Finish:

Corrosion and salt spray resistant electrostatic applied black polyester powder coat finish as standard color. Consult factory for special RAL chart colors and paint match.

### Voltage (50/60 Hz)

- 4 347-480 VAC, 0-10 volt dim,
- 6 120-277 VAC, 0-10 volt dim.

### Characteristics:

- Nominal line voltage: 120-277V 50/60Hz
- IP67 rated driver , outdoor/indoor, humid or wet conditions.
- PF Power factor >0.9,
- 50,000 hours tested L70,
- Weight: 42 lbs (19kg)
- Operating temperatures:  
Min -30°C (-22°F)  
Max +55°C (+131°F)
- Comes standard with 1m (39 inches) SJOOW 18/3 cable.

### Options (consult factory):

- Triac or 0-10V dimming available
- Dali or DMX controls,
- Choices of wiring and connecting devices,

### Mounting:

Available with different mounting options: standard 3-hole yoke mount, and slip-fit mount. Other options are available.

### Certification :



Meets and exceeds industry ANSI/UL UL-1598, 8750, CAN/CSA, CSA-22.2 no 250.0 & CSA-22.2 no 250.13 standards for safety and compliance.



NTTL-240W



### Yoke Mount Detail:

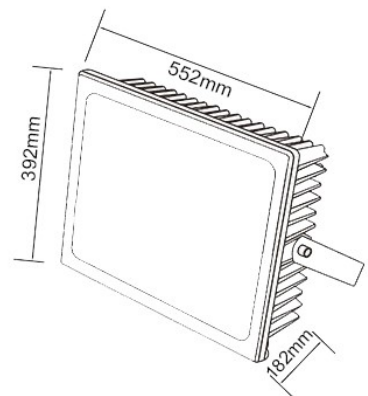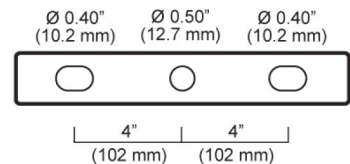

NTTL-240W			
CCT	Color°K	Min. Pulsed Lumens	Typ. Eff. Lumens/Watt
2700K		35220	146
3000K		37791	157
3500K		37788	157
4000K		38157	158
5000K		39315	163
5700K		39990	166
6500K		40725	169

### Ordering Matrix / Specification

Model	Wattage	Voltage	Color	Lens	Beam	Mounting	Housing color
NTTL	240W						
		4 347-480 VAC 6 120-277 VAC	W27 (2700K) W30 (3000K) W35 (3500K) W40 (4000K) W50 (5000K)	C Clear    FR Frost	W1 Wide 120 x 140 L60 High power lens S29 Spot 29° S46 Medium spot 46° W1 Wide 120 x 140	Y Yoke SF Split fit * *Consult factory	B Black RAL RAL



5 YEARS limited manufacturer warranty under normal conditions of use.

The Bridgelux logo and Vero name are registered trademarks of Bridgelux Inc. And are used under trademark license agreement.

### Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, [www.natechlighting.com](http://www.natechlighting.com), [info@natechlighting.com](mailto:info@natechlighting.com)

This specification is valid as of 2015-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.  
Copyright 2014 Natech Industrie. All rights reserved.